


MERIS OTTOBIT QUICKSTART

Sample Rate:
Changes the sample rate
from 0.1 Hz to 48KHz
Alt Function: Mix
Changes the mix level from dry to wet.

Tap Tempo:
Sets the speed of the LFO and
the timing of the triggered envelope.
Hold to access Alt Functions:
Alt Functions are only accessible
when Tap Tempo is being held.

Trigger Depth:
Changes the amount the trigger
affects the Sample Rate.
Alt Function: Trigger Ratio
Changes the timing of the
triggered envelope.

LFO Depth:
Changes the amount the LFO
affects the Sample Rate.
Alt Function: LFO Waveform
Changes the waveform of the LFO.

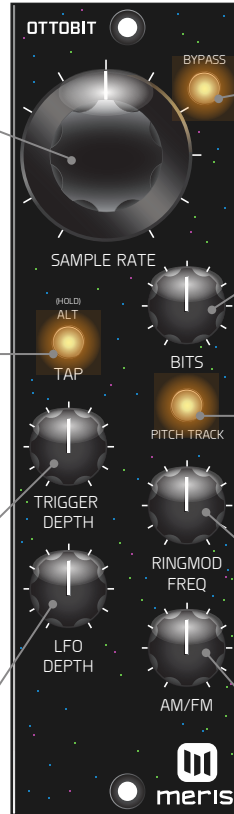

Bypass:
Disables processing and passes the
input through to the output.

Bits:
Changes the bit depth
from 1 bit to 24 bits.
Alt Function: Post Bits Level
Attenuates the signal post Bit crushing.

Pitch Track:
Links the Ring Mod's Carrier frequency
to the pitch of the input signal.
Alt Function: Trigger Direction
Changes the triggered envelope's direction.

Ring Mod Frequency:
Changes the frequency of the Carrier
Oscillator.
Alt Function: RM Waveform
Changes the waveform of the Ring
Modulator's Carrier Oscillator.

AM/FM Mix:
Blends between AM and FM signals.
Alt Function: FM Depth
Changes the depth of the FM portion
of the Ring Modulator only.